


HEAVY DUTY CANTILEVER UMBRELLA
ECLIPSE® V4

Australian Des. Reg. No. 202418675

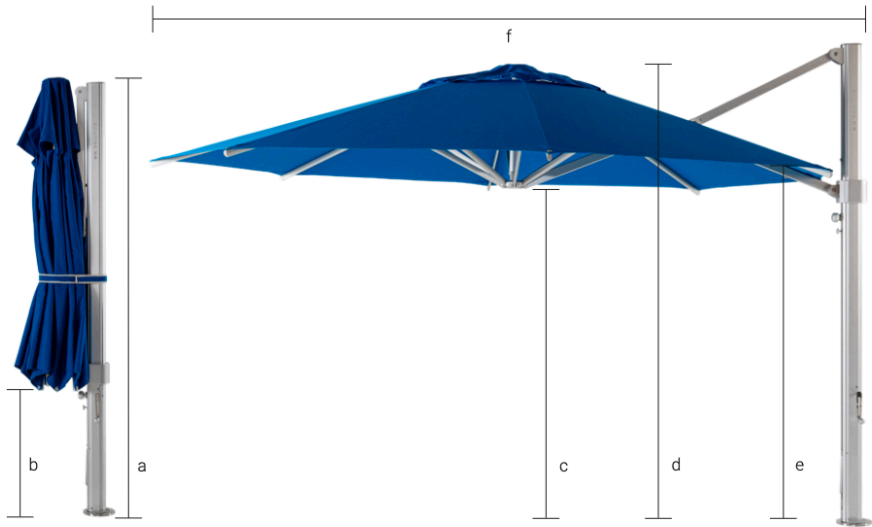

Dimensions

All measurements are rounded and are subject to change. *The wind speeds are provided as a guide only. Refer to our website and Product Owner Manual provided with the umbrella for more information. The product warranty does not cover wind damage regardless of wind speed. ** Wind rating is a guide based on using our Freestanding '880' base.

CLOSED UMBRELLA

	3M SQ	4M OCT	3X4M RECT	3.5M SQ
a: Mast height (cm)	283	283	283	283
b: Distance from arms to ground (cm)	68	80	34	34
Weight of umbrella when folded (kg)	44	45	46	47

OPEN UMBRELLA

c: Height to canopy hub (cm)	205	207	212	212
d: Total height to top of canopy (cm)	283	275	285	289
e: Height to edge of canopy (cm)	210	210	210	210
f: Distance back of mast to edge of canopy (cm)	329	405	329	375
Canopy Shade Area	9m²	11.3m²	12m²	12.25m²

PACKAGING DIMENSIONS

Dimensions of cardboard packaging (cm)	295x51x30			
Weight of umbrella when packaged with spigot (kg)	60	62	63	64

WIND GUIDANCE*

Installed wind rating (km/h)*	65	50
Freestanding 880 base rating (km/h)**	30	Install Only

KEY FEATURES



Solid Aluminium Hub



Stainless Steel Winder Handle



Aluminium Tilt Locking Knob



24 Rotational Locking Positions

SPIGOT



316 Stainless Steel Spigot as Standard

DOWNLOAD GUIDES



Manual



Video

FRAME FINISH



Matt Silver Anodised

White PC

Bronze PC

Black PC

STANDARD ACRYLIC COLOURS



Natural

Slate


Smoked Tweed

WARRANTY




INSTALLATION FITTINGS

CENTRE POST INGROUND (SOCKET & SLEEVE KIT)



Finish: Galvanised steel with 304SS lid.
Weight: 5kg
Boxed weight: 6kg
Carton size: 67cm x 15cm x 15cm
Suit: Cafe Series, Monterey, Monaco, Greenwich.


CANTILEVER EXTENDED INGROUND



Finish: Galvanised steel
Features: Adjustable concrete stabilisers
Weight: 16kg
Boxed weight: 17kg
Carton size: 106cm x 25cm x 25cm
Suit: Eclipse® all versions, Aurora


Note: Spigot hole distance is 120mm

CENTRE POST DECK PLATE & SPIGOT



Finish: Galvanised steel, 304SS.
Spigot size: 40mm & 50mm
Weight: 5kg
Boxed weight: 6kg
Carton size: 23cm x 23cm x 3cm (plate)
 36cm x 13cm x 13cm (spigot)
Suit: Cafe Series, Monterey, Monaco, Greenwich.


CANTILEVER BASE PLATE



Finish: 316SS, Silvermist PC, Black PC
Weight: 7kg
Boxed weight: 8kg
Carton size: 33cm x 33cm x 3cm
Suit: Eclipse® all versions, Aurora

Note: Installation hole distance is 220mm
 Spigot hole distance is 120mm


CANTILEVER STANDARD INGROUND



Finish: Galvanised steel
Weight: 6kg
Boxed weight: 7kg
Carton size: 40cm x 25cm x 25cm
Suit: Eclipse® all versions, Aurora

Note: Spigot hole distance is 120mm

NOVA HD INGROUND




Finish: Galvanised steel
Weight: 8kg
Boxed weight: 9kg
Carton size: 56cm x 25cm x 25cm
Suit: Nova HD & Nova LED

Note: Spigot hole distance is 130mm


INSTALLATION FITTINGS

NOVA HD BASE PLATE




Finish: Galvanised steel
Weight: 12kg
Boxed weight: 13kg
Carton size: 41cm x 41cm x 3cm
Suit: Nova HD & Nova LED
Note: Installation hole distance is 175mm. Spigot hole distance is 130mm.

PARAFLEX POST INGROUND SPIGOT




Finish: Galvanised steel
Weight: 4kg
Boxed weight: 5kg
Carton size: 90cm x 17cm x 10cm
Suit: Paraflex & Paraflex UX

BARREL SPACER 30CM




Finish: Zinc plated, Silvermist PC
Weight: 15kg
Boxed weight: 16kg
Carton size: 39cm x 25cm x 25cm
Suit: Eclipse® all versions, Aurora
Note: Spigot hole distance is 120mm

PARAFLEX POST BOLT DOWN SPIGOT




Finish: Galvanised steel
Weight: 4kg
Boxed weight: 5kg
Carton size: 55cm x 23cm x 23cm
Suit: Paraflex & Paraflex UX
Note: Installation hole distance is 130mm

BARREL SPACER 50CM



Finish: Zinc plated, Silvermist PC
Weight: 21kg
Boxed weight: 23kg
Carton size: 57cm x 25cm x 25cm
Suit: Eclipse® all versions, Aurora
Note: Spigot hole distance is 120mm

VERSA UX INGROUND




Finish: Galvanised steel
Weight: 6kg
Boxed weight: 7kg
Carton size: 55cm x 13cm x 23cm
Suit: Versa UX

ACCESSORIES


INSTALLATION FITTINGS

VERSA & ICARUS UX BOLT DOWN SPIGOT FOR TIMBER DECKING




- Finish: Galvanised steel
Weight: 11kg
Boxed weight: 12kg
Carton size: 55cm x 30cm x 30cm
Suit: Versa UX

TIMBER DECKING INSTALLATION KIT - STAINLESS STEEL




- Finish: 316 Stainless Steel Base Plate
Weight: 9kg
Boxed weight: 11kg
Suit: Eclipse® all versions, Aurora
Includes:
- 4x Counter Sunk 304 SS M10x150mm Bolts
 - 4x Nyloc Nut 304 SS
 - 4x Washer Gal M10x50x50x3mm

CONCRETE INSTALLATION KIT - STAINLESS STEEL




- Finish: 316 Stainless Steel Base Plate
Weight: 9kg
Boxed weight: 11kg
Suit: Eclipse® all versions, Aurora
Includes:
- 316 Stainless Steel Base Plate
 - 4x Counter Sunk 316 SS Screw M10x120mm
 - 1x Impax Power Bit

TIMBER DECKING INSTALLATION KIT - GREY PC



- Finish: Galvanised Silvermist PC Base
Weight: 8kg
Boxed weight: 10kg
Suit: Eclipse® all versions, Aurora
Includes:
- 4x Counter Sunk 304 SS M10x150mm Bolts
 - 4x Nyloc Nut 304 SS
 - 4x Washer Gal M10x50x50x3mm

CONCRETE INSTALLATION KIT - GREY PC




- Finish: Galvanised Silvermist PC Base
Weight: 8kg
Boxed weight: 10kg
Suit: Eclipse® all versions, Aurora
Includes:
- 316 Stainless Steel Base Plate
 - 4x Counter Sunk 316 SS Screw M10x120mm
 - 1x Impax Power Bit

Installing an umbrella can sometimes be a bit challenging, but don't worry—we've got you covered. To help simplify the process, we've put together a series of step-by-step videos. These guides are designed to walk you through each part of the installation, making it easier and more straightforward. With our helpful tips, you'll have your umbrella set up in no time!



OPTIONAL ACCESSORIES

CAFE SERIES PROTECTIVE COVER




Small to suit: A: 165cm
2m Sq & 2.8m B: 29øcm
Oct C: 35øcm
Weight: 2kg

Large to suit: A: 225cm
3m Sq & 4.2m B: 30øcm
Oct C: 45øcm

Weight: 3kg

MONACO PROTECTIVE COVER




Small to suit: A: 190cm
2.5m Sq & B: 20øcm
3.5m Oct C: 45øcm
Weight: 2kg

Large to suit: A: 230cm
3m Sq B: 20øcm
C: 45øcm

Weight: 2.5kg

CAFE SERIES CARRY COVERS



Small to suit: A: 165cm
2m Sq & 2.8m B: 23øcm
Oct C: 30øcm
Weight: 1kg

Large to suit: A: 230cm
3m Sq & 4.2m B: 27øcm
Oct C: 35øcm

Weight: 1.5kg

GREENWICH PROTECTIVE COVER



Small to suit: A: 196cm
2m Sq & 3.2m B: 23øcm
Oct C: 40øcm
Weight: 3kg

Large to suit: A: 253cm
3m Sq & B: 25øcm
2.5x3.4m Rect C: 45øcm

Weight: 3.5kg

MONTEREY PROTECTIVE COVER



Small to suit: A: 156cm
2.7m Oct B: 17øcm
C: 30øcm
Weight: 2kg

ECLIPSE / AURORA PROTECTIVE COVER




Small to suit: A: 230cm
3m Sq & 4m B: 55øcm
Oct C: 45øcm
Weight: 4kg

Large to suit: A: 265cm
3.5m Sq, B: 55øcm
3x4m Rect C: 45øcm

Weight: 5kg

ACCESSORIES INSTALLATION FITTINGS

TIMBER DECKING INSTALLATION FITTINGS

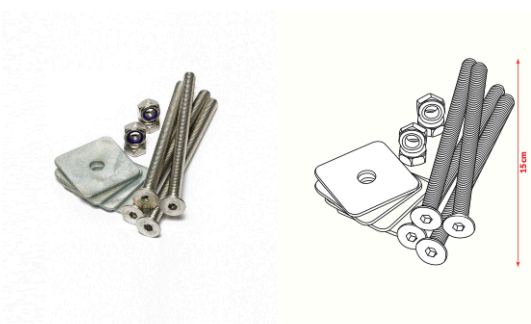

- Weight:

1kg
- Boxed weight:


1.5kg
- Suit:

Eclipse® all versions, Aurora, Versa UX, Nova HD, Nova LED
- Includes:

- 4x Counter Sunk 304 SS M10x150mm Bolts
 - 4x Nyloc Nut 304 SS
 - 4x Washer Gal M10x50x50x3mm
- Note:

Extra 2pcs of all fittings are required for Nova HD and Nova LED installations.

CONCRETE INSTALLATION FITTINGS

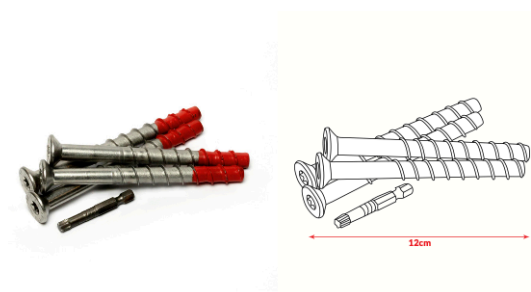

- Weight:

1kg
- Boxed weight:

1.5kg
- Suit:

Eclipse® all versions, Aurora, Versa UX, Nova HD, Nova LED
- Includes:

- 4x Counter Sunk 316 SS Screw M10x120mm
 - 1x Impax Power Bit
- Note:

Extra two M10 counter sunk screws are required for Nova HD and Nova LED installations.

PARAFLEX INSTALL KIT



- Weight:

1kg
- Boxed weight:


1.5kg
- Suit:

Paraflex Wall Mount
- Includes:

- 2x Domed SS Hex Nuts
 - 2x M10 x 100 Threaded Rod
 - 4x SS Flat washer
 - 1x Tube Soudal Chemical Anchor
- Note:

Can be applied with a standard caulking gun and cures fast. Read instructions before installation.

ECLIPSE® & AURORATILT MEASUREMENTS

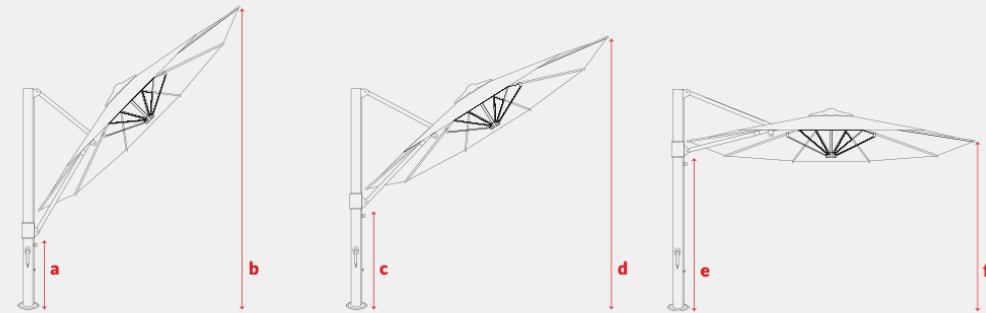

ECLIPSE® V4 TILT MEASUREMENTS

	3m Sq	4m Oct	3.5m Sq	3m x 4m Rect
a:	1170mm	1030mm	1080mm	1300mm
b:	3800mm	4450mm	3710mm	3890mm
c:	1650mm	1585mm	1570mm	1730mm
d:	2730mm	2885mm	2620mm	2680mm
e:	2130mm	2140mm	2060mm	2160mm
f:	2130mm	2140mm	2060mm	2160mm

AURORA TILT MEASUREMENTS

	2.8m Sq	3.5m Oct
a:	1310mm	1180mm
b:	3950mm	3990mm
c:	1680mm	1645mm
d:	2590mm	2770mm
e:	2050mm	2110mm
f:	2050mm	2110mm



Measurement A, has been taken from under the slider car. Measurement B, has been taken from under the canopy. All measurements are intended to be used as a guide only. You need to consider factors like, uneven surface etc.

BEAUFORT SCALE WIND SPEED EXPLAINED

The Beaufort Scale or Beaufort Wind Force Scale is a system for estimating wind strengths without the use of instruments. This is a useful tool in estimating the wind characteristics over a large area, and it may be used to measure and describe the effects of different wind velocities on objects on land.


BFT NO	CATEGORY	WIND KM/H	LAND CONDITIONS
0	Calm	<1 km/h	Smoke rises vertically.
1	Light Air	1-5 km/h	Wind visible in smoke.
2	Light Breeze	6-11 km/h	Leaves rustle. Wind felt on face.
3	Gentle Breeze	12-19 km/h	Leaves & twigs in constant motion.
4	Moderate Breeze	20-28 km/h	Dust & loose paper raise. Small branches begin to move.
5	Fresh Breeze	29-38 km/h	Branches of moderate size move. Small trees begin to sway.
6	Strong Breeze	39-49 km/h	Large branches in motion. Whistling heard in overhead wires. Umbrella use becomes difficult.
7	Near Gale	50-61 km/h	Whole trees in motion. Inconvenience felt walking against the wind.
8	Gale	62-74 km/h	Twigs break on trees.
9	Strong Gale	75-88 km/h	Some branches break. Some small trees blow over.
10	Storm	89-102 km/h	Tree uprooted. Considerable structural damage occurs.
11	Violent Storm	103-117 km/h	Widespread vegetation damage. Roofing surfaces damaged.
12	Hurricane	>118 km/h	Windows may break. Sheds damaged. Debris maybe hurled about.



PRODUCT STRENGTH ACCORDING TO BEAUFORT SCALE


Model	Size	Beaufort Number	
Cafe Series	All sizes	Installed: 4 - 7	Freestanding Base: 3 - 4
Monterey	All sizes	Installed: 4 - 6	Freestanding Base: 3 - 4
Monaco	All sizes	Installed: 4 - 7	Freestanding Base: 3 - 4
Greenwich	All Sizes	Installed: 4 - 7	Freestanding Base: 3 - 4
Paraflex & Paraflex UX	All Sizes	Installed: 3 - 6	Freestanding Base: 3 - 4
Aurora	All Sizes	Installed: 4 - 6	Freestanding Base: 3 - 4
Eclipse®	3m Sq & 4m Oct	Installed: 4 - 7	Freestanding Base: 3 - 4
Eclipse®	3.5m Sq & 3x4 Rect	Installed: 4 - 6	Freestanding Base: N/A
Versa UX	3m Sq	Installed: 4 - 7	Freestanding Base: 3 - 4
Nova HD	3m Sq & Offset	Installed: 5 - 10	Freestanding Base: N/A
Nova HD	4m Sq & 5m Sq	Installed: 5 - 9	Freestanding Base: N/A
Nova HD	5m Oct	Installed: 5 - 9	Freestanding Base: N/A

CANTILEVER UMBRELLA




For all cantilever umbrellas we advise to position the arm in the direction of the wind (1). Tilt knob to be engaged in hole if applicable (2). Umbrella canopy to be horizontal. When closing the umbrella, the strap and protection cover need to be correctly used. Failure in doing so can cause damage even in a closed position.

WALL MOUNT UMBRELLA




For the Paraflex wall mount we advise to position the arm in the direction of the wind (1). Completely stretch out the arm (2). Umbrella canopy to be horizontal (3). When closing the umbrella, the strap and protection cover need to be correctly used. Failure in doing so can cause damage even in a closed position.

VERSA UX UMBRELLA




For Versa UX, we advise to position the umbrella in the direction of the wind (1). Put the arm in a 10° angle (2) and put the umbrella on a flat surface. When closing the umbrella, the strap and protection cover need to be correctly used. Failure in doing so can cause damage even in a closed position.

MONTEREY UMBRELLA




Avoid wind from below (1). Put full tension on the canopy (2). Umbrella canopy is to be horizontal (3). Put the umbrella on a flat surface. When closing the umbrella, the strap and protection cover need to be correctly used. Failure in doing so can cause damage even in a closed position.

PATIO / MARKET UMBRELLAS



For our patio / market range, we advise to avoid wind from below (1), to put full tension on the canopy (2) and put the umbrella on a flat surface. When closing the umbrella, the strap is to be correctly used. Failure in doing so can cause damage even in a closed position.

NOVA HD



The Nova HD, we advise to avoid wind from below (1), and to put full tension on the canopy (2). When closing the umbrella, the strap or halo ring is to be correctly used. Failure in doing so can cause damage even in a closed position.




GUIDELINES FOR POOL INSTALLATION

As per AS/NZS 3000:2018, clause 5.6.2.6.2, where the pool structure is conductive, (concrete pools are considered to be conductive) all conductive parts that are directly or indirectly in contact with the ground and that are within arm's reach (1.25 metres from the inside edge of the pool) are required to be bonded to earth. This means that an installed umbrella will need to be bonded to the earth. A licensed electrician is required to carry out this bonding and it may be difficult to retrofit bonding to an existing pool.

In the case of a fibreglass pool, where there are exposed conductive parts of electrical equipment within the pool zone (3.5 metres) or exposed parts of electrical equipment in contact with the pool water, then bonding of conductive fixtures and fittings within arm's reach of a fibreglass pool is also required. The easiest solution to this is to install the umbrella more than 1.25m away from the pool edge.

A non-climbable zone should be maintained around pool fencing as per the diagram on the right. The umbrella should not be installed within this non-climbable zone as it may be considered a "climbable object".

If a professional has installed an umbrella on your behalf and it isn't to the correct specifications, you may be forced to remove the umbrella and re-install according to local government regulations. This would only occur in the instance where your pool area was inspected by local authorities.

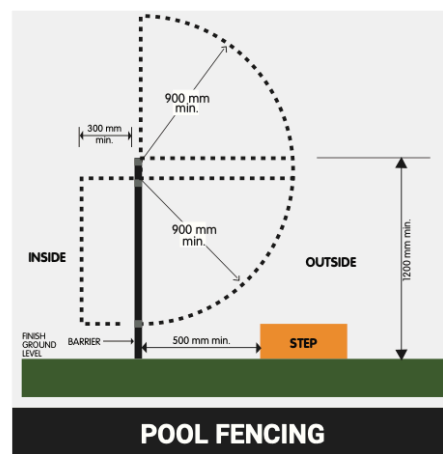

POOL FENCING

DOWNLOAD INSTALLATION GUIDES

QR codes provide a convenient way to access our installation guides. Simply scan the QR code with your smartphone or tablet to instantly view detailed instructions and helpful videos.



BASE PLATE ON DECKING



BASE PLATE ON CONCRETE



AURORA CROSS BASE



INSTALLATION HARDWARE



CANTILEVER BASE GUIDE



CANTILEVER INGROUND GUIDE



POOL INSTALLATION



PARAFLEX WALL MOUNT



WHAT IS IT THAT SETS US APART FROM OUR COMPETITORS?

We are the Industry leaders in the outdoor shade space, with our commitment to providing unmatched fade warranty on our fabrics ... we're woven differently!



FIBER

Our 100% solution-dyed acrylic fibers originate from a liquid acrylic polymer solution. Colour pigments are then added to the polymer solution before the fiber is extruded.



YARN

During the spinning process, the liquid is transformed into yarn that is fully dyed. This means the colour does not just remain on the surface, but it is consistent right from the heart of the yarn.



FABRIC

100% solution dyed acrylic fabrics have exceptional color retention as well as excellent technical properties and UV and weather resistance.

POLYESTER CANVAS | COMMERCIAL GRADE



WHITE



NATURAL



BLACK

OLEFIN CANVAS | TEXSILK BY ETISILK



NATURAL | 0117



SLATE | 0127



SMOKED TWEED | 0770

ACRYLIC CANVAS | RECACRIL BY RECASENS



YELLOW STRIPE | R55



ORANGE STRIPE | R5



RED STRIPE | R12



TURQUOISE STRIPE | R11



TEAL STRIPE | R14



BLUE STRIPE | R16



NAVY STRIPE | R65



BLACK STRIPE | R17

ACRYLIC CANVAS 8CM STRIPE REPEAT

